


# Lightbox 90

Curved LED frame

- NF-04905 / NF-04900
- NF-21905 / NF-21900
- NF-56905 / NF-56900
- Any colour possible

## Specifications

- ↔ 90 mm
- 📦 1.895 kilos/meter
- ↗ 6150 mm
- 💡 Illuminated
- ✓ Two-year warranty

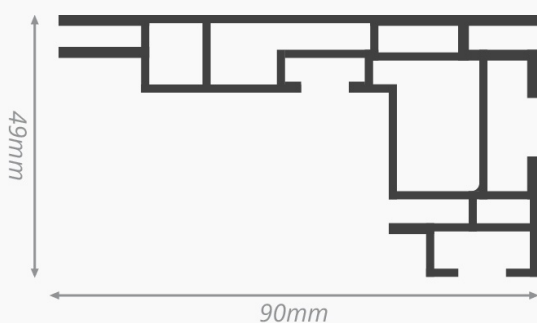


## About the Lightbox 90 (curved)

Single-sided curved profile for illuminating textile prints. The backlit illumination ensures an even distribution of light. The LED is mounted on the inside of the frame. For better light reflection, a blackout fabric can be attached to the back of the frame.

## The advantages

- ✓ Single-sided curved LED frame
- ✓ Available as a cylinder and curved frame
- ✓ Wall mounted or freestanding
- ✓ LED technology: LED on Stabilizer
- ✓ Two-year warranty

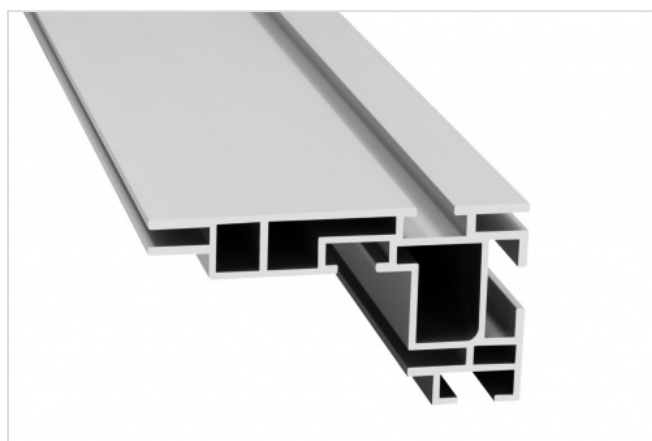

# Mounting



## Wall-mounted

Wall mounted frames with just one textile.




## Freestanding

Freestanding frame with a textile on both sides.

---

# Finish

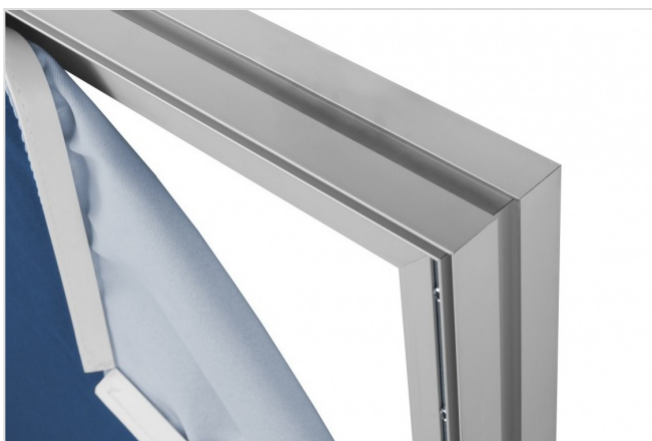

## Open


The outer groove facilitates the usage of accessories.



## Closed


An even finish. If desired, holes can be drilled in the profile so that accessories can be attached.

# Shapes

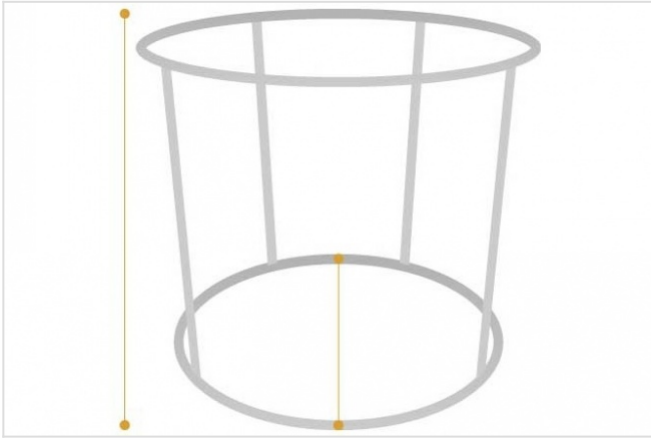

## Cylinder

The advantage of a cylinder is that it is visible from all sides.

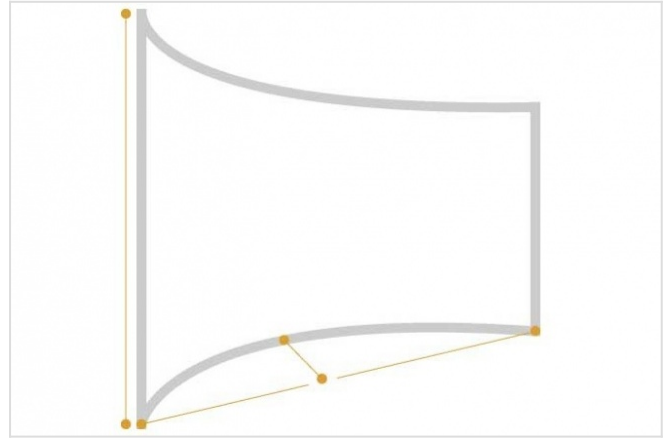

## Curved

Ideal as an impressive backdrop at trade fairs.

---

# Illumination



## LED on Stabilizer

- Even light distribution due to backlighting
- Suitable for small and large frames
- Compactly packed, economically transportable
- Relatively low power consumption

# Brightness



## Bright LED

- Most common brightness
- Even distribution of light
- Relatively low power consumption



## Super Bright LED

- Distinctive and impressive luminosity
- Dimmable, DALI dimmable, and non-dimmable
- Suitable for ceiling lighting
- Suitable for single-coloured and white textiles


---

# Lightcolour




**3000K**

Warm white.



**4000K**

Yellow white.



**6500K**

Bright white (daylight).

---

# Dimmable



## Dimmable

The brightness of the LED frame can be adjusted with a dimmer. This way, the light intensity can be determined depending on the environment.



## DALI dimmable

The LED frame is prepared for a connection to a DALI system.

---

# Dimmer



## Dimmer

The LEDs have white colours. The three most commonly used colours are: warm white, yellow white and bright white.

---

# Stabilizers



## Stabilizers


In order to guarantee the stability of the frame, stabilizers must be placed in the frame. This way the construction is sturdy.

# Recommended accessories

## Baseplates




**Baseplate simple**  
FK-0100



**Baseplate slim**  
FK-0105



**Baseplate slim refined**  
FK-0107




**Baseplate heavy**  
FK-0110

## Wall mounts




**Wall mount heavy**  
FK-0410

## Ceiling mounts



**Ceiling mount**  
FK-0360



**Suspension cable**  
FK-7900

## Connectors



**Frame connector 150 degrees**  
FK-0615



**Frame connector 135 degrees**  
FK-0620



**Frame connector 90 degrees**  
FK-0630




**Frame connector 180 degrees**  
FK-0640

## Locksets



**Lockset heavy**  
FK-0200



**Lockset heavy single plate**  
FK-0202



**Lockset heavy short**  
FK-0205



**Flexible lockset**  
FK-0430

## Extension sets



**Extension set heavy**  
FK-0500



**Extension set aluminium keeper**  
FK-0532

## Stabilizers



**Stabilizer 43**  
NF-04438

## Led-componenten



**Powered 3LEDs**  
AF90-016



**Powered 6LEDs**  
AF90-017



**Powered 9LEDs**  
AF90-015



**Powered 3LEDs**  
AF90-040

## Led-strips



**Powered 6LEDs**

AF90-045



**2.1W / 24V (47 cm)**

AF90-035

## Controllers



**LED controller  
dimmer**

AF92-220

## Drivers



**Led driver 24V/30W  
with cable**

AF99-338-WC



**Led driver 24V/60W  
bulk**

AF99-340-BP



**Led driver 24V/60W**

AF99-340



**Led driver 24V/60W  
with cable**

AF99-340-WC