


Lightbox Double 200

Double-sided LED frames

- NF-042000
- NF-212000
- NF-562000
- Any colour possible

Specifications

- ↔ 200 mm
- 📦 2.873 kilos/metre
- ↗ 6150 mm
- 💡 Illuminated
- Ⓢ CE certified
- ✓ Two-year warranty



About the Lightbox Double 200

This extra sturdy double-sided illuminated profile has been specially designed for illuminating extremely large-format textile prints and is a real all-rounder. Available with side lighting and backlit illumination.

The advantages

- ✓ Suitable for extra large formats
- ✓ LED technology: edge-lit and LED on Stabilizer
- ✓ Even light distribution
- ✓ Two-year warranty



Lightbox Double 200 Double-sided LED frames

Mounting



Freestanding

Freestanding frame with a textile on both sides.



Attached to the ceiling

Frames suspended from the ceiling. Both horizontal as well as vertical suspension is possible.

Finish



Closed

An even finish. If desired, holes can be drilled in the profile so that accessories can be attached.

Illumination



Edge-lit

- lit from the edge
- Good quality/price ratio
- Compactly packed, economically transportable
- Relatively low power consumption



LED on Dibond

- Even light distribution due to backlighting
- Suitable for small and medium sized frames
- Narrow frames possible
- Quick installation due to pre-assembled frame



LED on Stabilizer

- Even light distribution due to backlighting
- Suitable for small and large frames
- Compactly packed, economically transportable
- Relatively low power consumption

Brightness



Bright LED

- Most common brightness
- Even distribution of light
- Relatively low power consumption



Super Bright LED


- Distinctive and impressive luminosity
- Dimmable, DALI dimmable, and non-dimmable
- Suitable for ceiling lighting
- Suitable for single-coloured and white textiles

Lightcolour




3000K

Warm white.



4000K

Yellow white.



6500K

Bright white (daylight).

Dimmable



Dimmable

The brightness of the LED frame can be adjusted with a dimmer. This way, the light intensity can be determined depending on the environment.



DALI dimmable

The LED frame is prepared for a connection to a DALI system.

Dimmer



Dimmer

The LEDs have white colours. The three most commonly used colours are: warm white, yellow white and bright white.



Dimmer RGB

It is possible to form all colours with the LED frame.

Stabilizers




Stabilizers

In order to guarantee the stability of the frame, stabilizers must be placed in the frame. This way the construction is sturdy.

Recommended accessories


Baseplates



Baseplate D200


FK-0140

Ceiling mounts



Ceiling mount

FK-0360

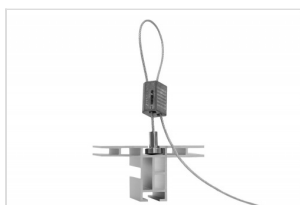

Suspension cable

FK-7900

Connectors



Frame Connector

FK-0668

Locksets



Lockset 200

FK-0230



Lockset stabilizer

FK-0220



Lockset mini stabilizer

FK-0220S



Lockset stabilizer 45°

FK-0222

Extension sets



Extension set 200

FK-0530

Stabilizers



Stabilizer 43

NF-04438



Mini stabilizer

NF-56240

Led-componenten



Powered 3LEDs

AF90-016



Powered 6LEDs

AF90-017



Powered 9LEDs

AF90-015



Powered 3LEDs

AF90-040

Led-strips



Powered 6LEDs

AF90-045



2.1W / 24V (47 cm)

AF90-035



FK7 12LEDs

AF92-020



FK7 2LEDs

AF92-005

Controllers



**LED controller
dimmer**

AF92-220

Drivers



**Led driver 24V/30W
with cable**

AF99-338-WC



**Led driver 24V/60W
bulk**

AF99-340-BP



Led driver 24V/60W

AF99-340



**Led driver 24V/60W
with cable**

AF99-340-WC